


Steel Distribution Poles Type H6 Series

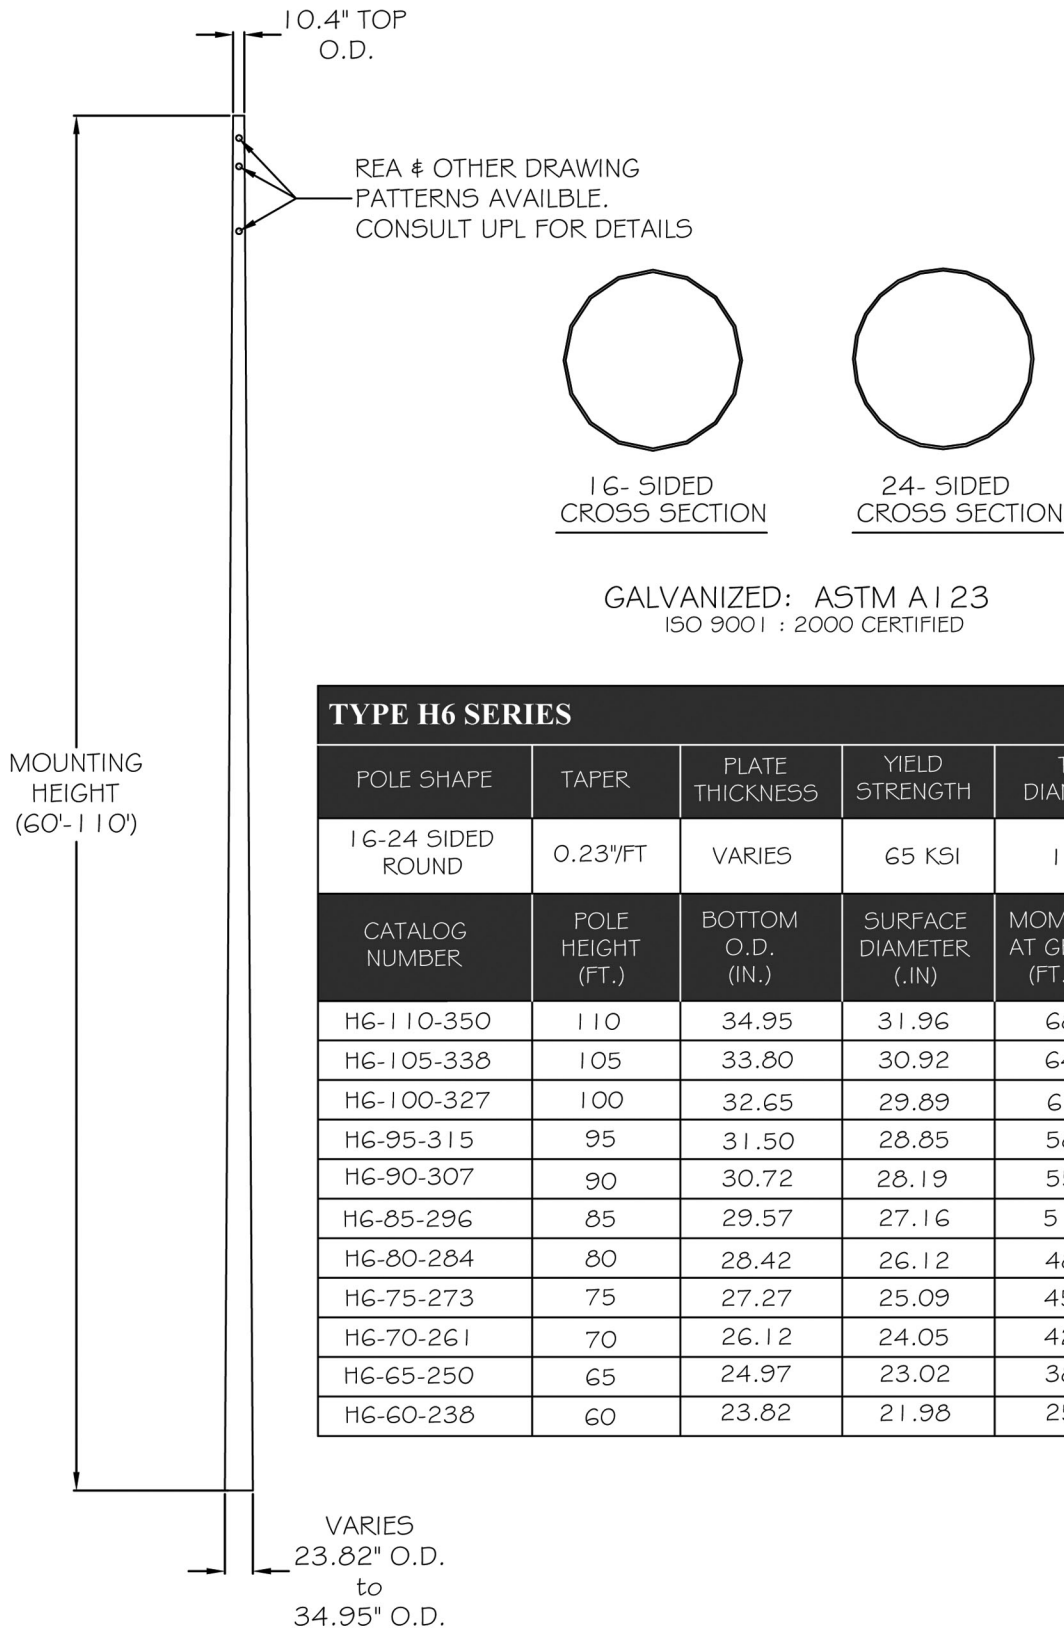

GALVANIZED: ASTM A123
ISO 9001 : 2000 CERTIFIED

TYPE H6 SERIES					
POLE SHAPE	TAPER	PLATE THICKNESS	YIELD STRENGTH	TOP DIAMETER	
16-24 SIDED ROUND	0.23"/FT	VARIES	65 KSI	10.4"	
CATALOG NUMBER	POLE HEIGHT (FT.)	BOTTOM O.D. (IN.)	SURFACE DIAMETER (.IN)	MOMENT CAP AT GRND LINE (FT.-KIPS)	POLE WEIGHT (lbs.)
H6-110-350	110	34.95	31.96	681.3	5923
H6-105-338	105	33.80	30.92	648.7	5502
H6-100-327	100	32.65	29.89	616.1	5095
H6-95-315	95	31.50	28.85	583.5	4703
H6-90-307	90	30.72	28.19	551.1	3991
H6-85-296	85	29.57	27.16	518.6	3675
H6-80-284	80	28.42	26.12	486.2	3370
H6-75-273	75	27.27	25.09	453.8	3079
H6-70-261	70	26.12	24.05	421.5	2799
H6-65-250	65	24.97	23.02	389.2	2531
H6-60-238	60	23.82	21.98	256.9	2274