


# Steel Distribution Poles Type H3 Series

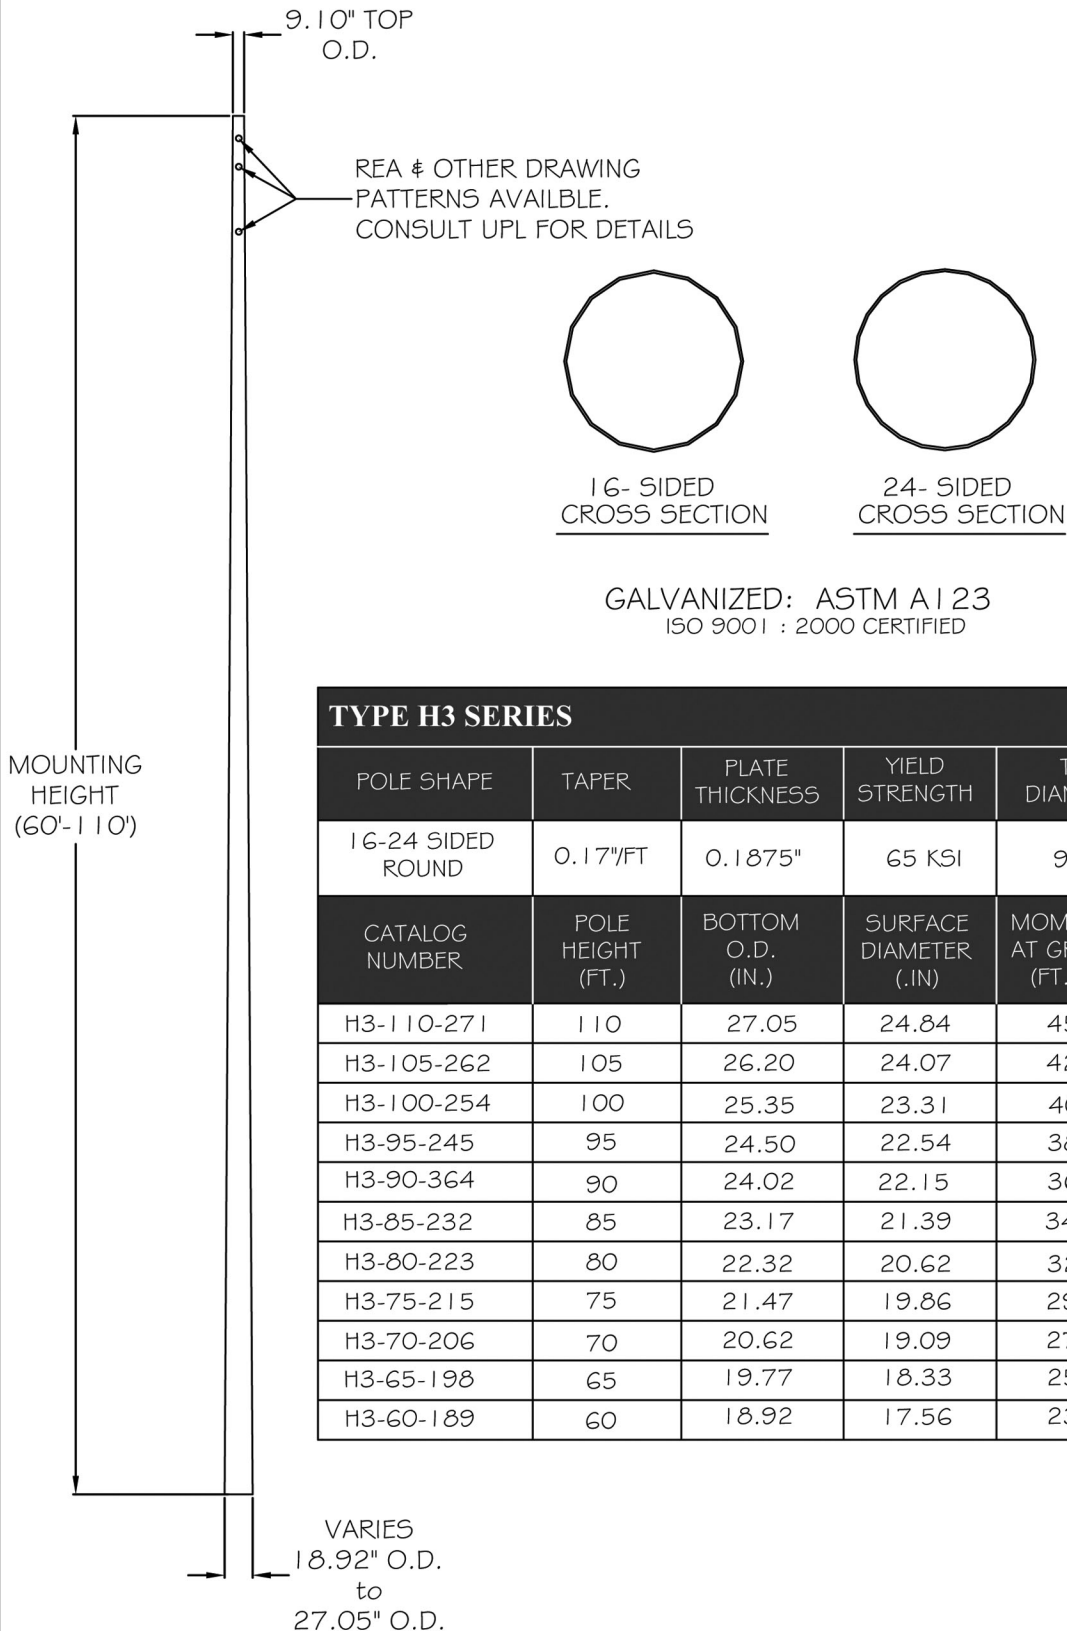

| TYPE H3 SERIES    |                   |                   |                        |                                    |                    |
|-------------------|-------------------|-------------------|------------------------|------------------------------------|--------------------|
| POLE SHAPE        | TAPER             | PLATE THICKNESS   | YIELD STRENGTH         | TOP DIAMETER                       |                    |
| 16-24 SIDED ROUND | 0.17"/FT          | 0.1875"           | 65 KSI                 | 9.10"                              |                    |
| CATALOG NUMBER    | POLE HEIGHT (FT.) | BOTTOM O.D. (IN.) | SURFACE DIAMETER (.IN) | MOMENT CAP AT GRND LINE (FT.-KIPS) | POLE WEIGHT (lbs.) |
| H3-110-271        | 110               | 27.05             | 24.84                  | 450.6                              | 4364               |
| H3-105-262        | 105               | 26.20             | 24.07                  | 428.8                              | 4085               |
| H3-100-254        | 100               | 25.35             | 23.31                  | 407.1                              | 3815               |
| H3-95-245         | 95                | 24.50             | 22.54                  | 385.4                              | 3554               |
| H3-90-364         | 90                | 24.02             | 22.15                  | 363.7                              | 3192               |
| H3-85-232         | 85                | 23.17             | 21.39                  | 342.2                              | 2945               |
| H3-80-223         | 80                | 22.32             | 20.62                  | 320.7                              | 2706               |
| H3-75-215         | 75                | 21.47             | 19.86                  | 299.2                              | 2476               |
| H3-70-206         | 70                | 20.62             | 19.09                  | 277.8                              | 2256               |
| H3-65-198         | 65                | 19.77             | 18.33                  | 256.5                              | 2045               |
| H3-60-189         | 60                | 18.92             | 17.56                  | 235.2                              | 1843               |